



AOM701 to AOM713 Swap out instructions

Remove the **AOM701** monitor panel, Intermediate harness, connection cable and power harness from the existing system. The main camera cable will remain.

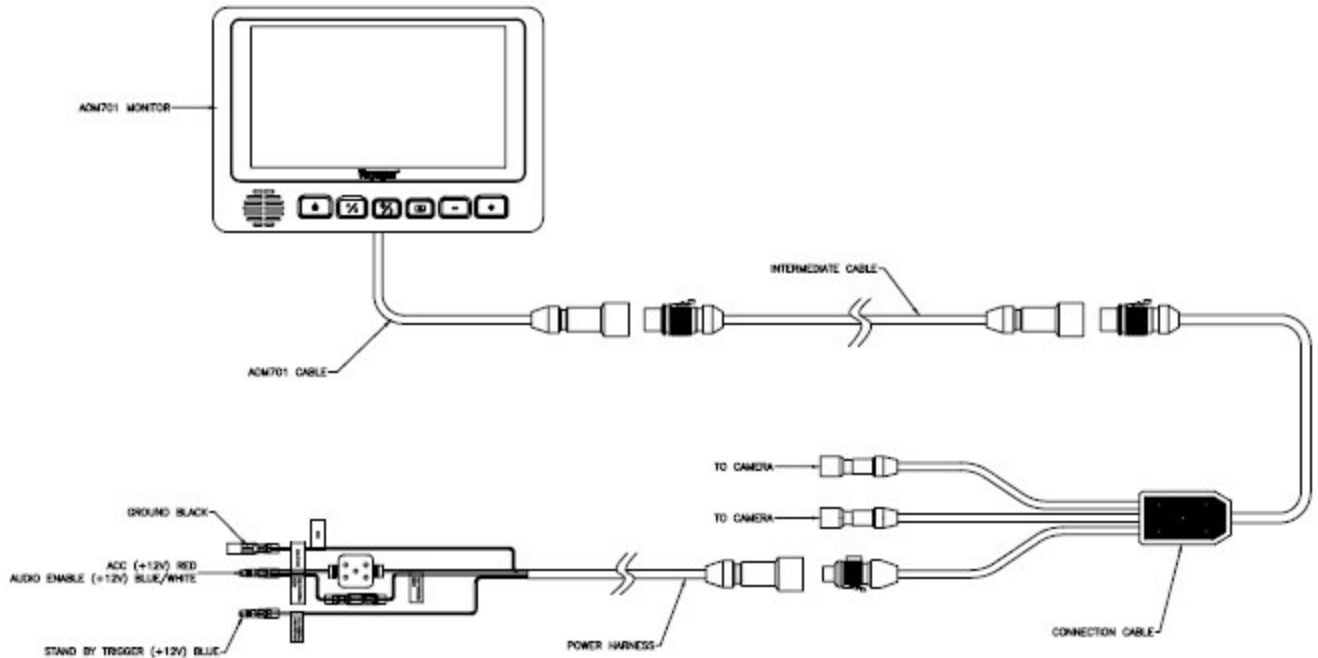

Install the **AOM713** monitor panel and wiring harness in place of the old system. Your camera cable will connect into the **TO CAMERA** inputs.

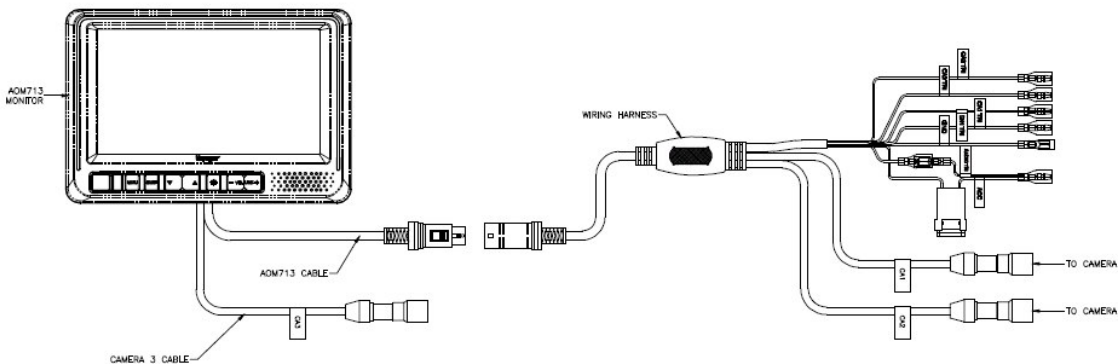

If you need more length for your application, you will need to extend your power/trigger wires and pull additional camera cable up to the monitor's harness or use an additional camera cable to extend the existing cable (p/n **CEC15** -15 ft.).